

FIG. 1

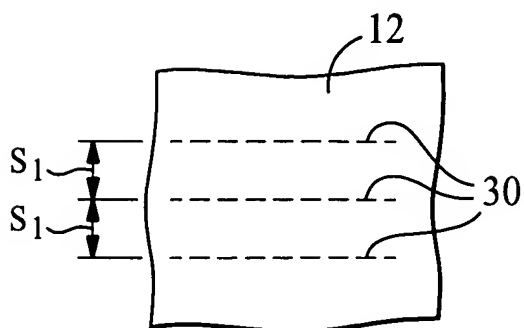


FIG. 2

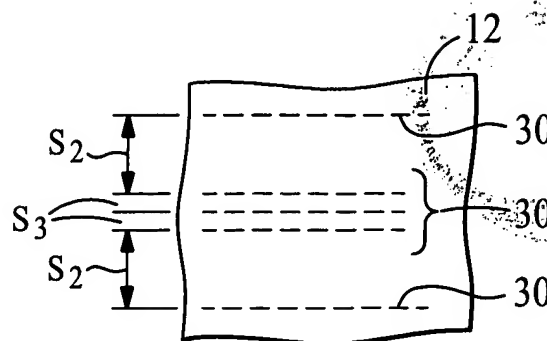


FIG. 3

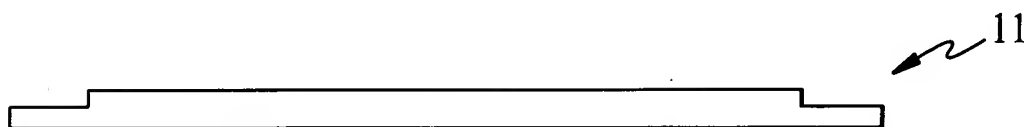


FIG. 4

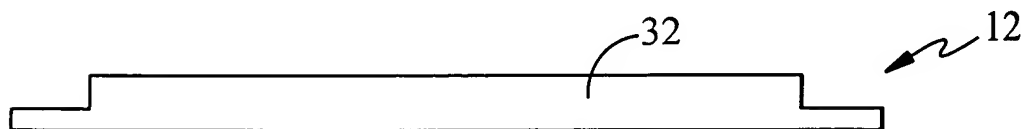


FIG. 4A

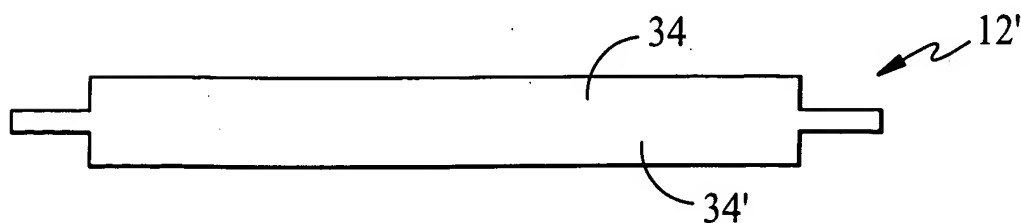


FIG. 4B

202405342800F




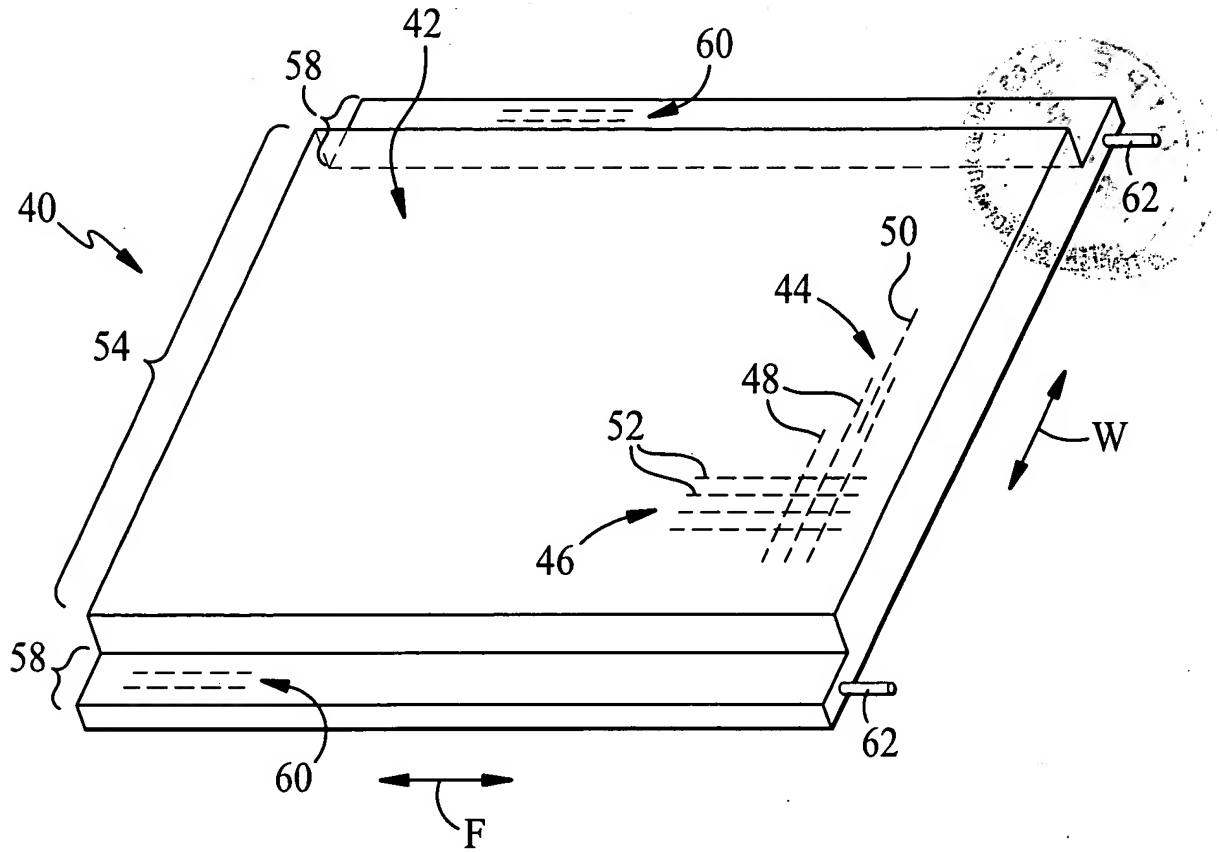


FIG. 5

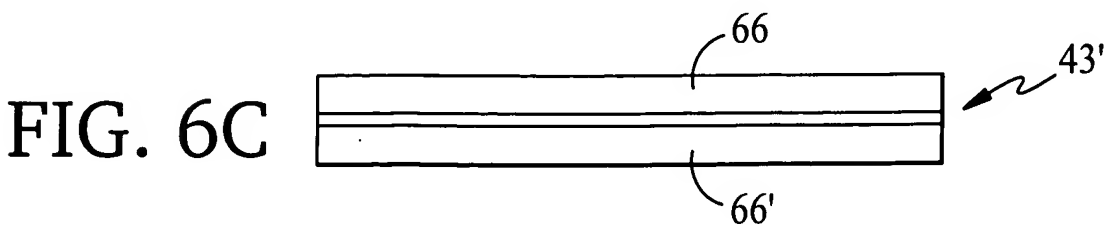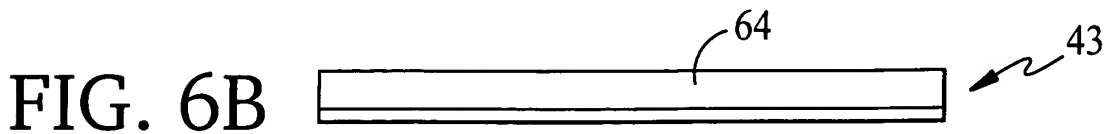

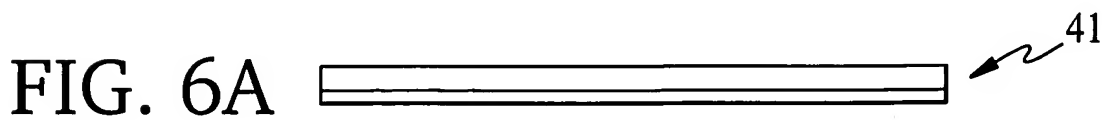

202F140" Sheet 2300T

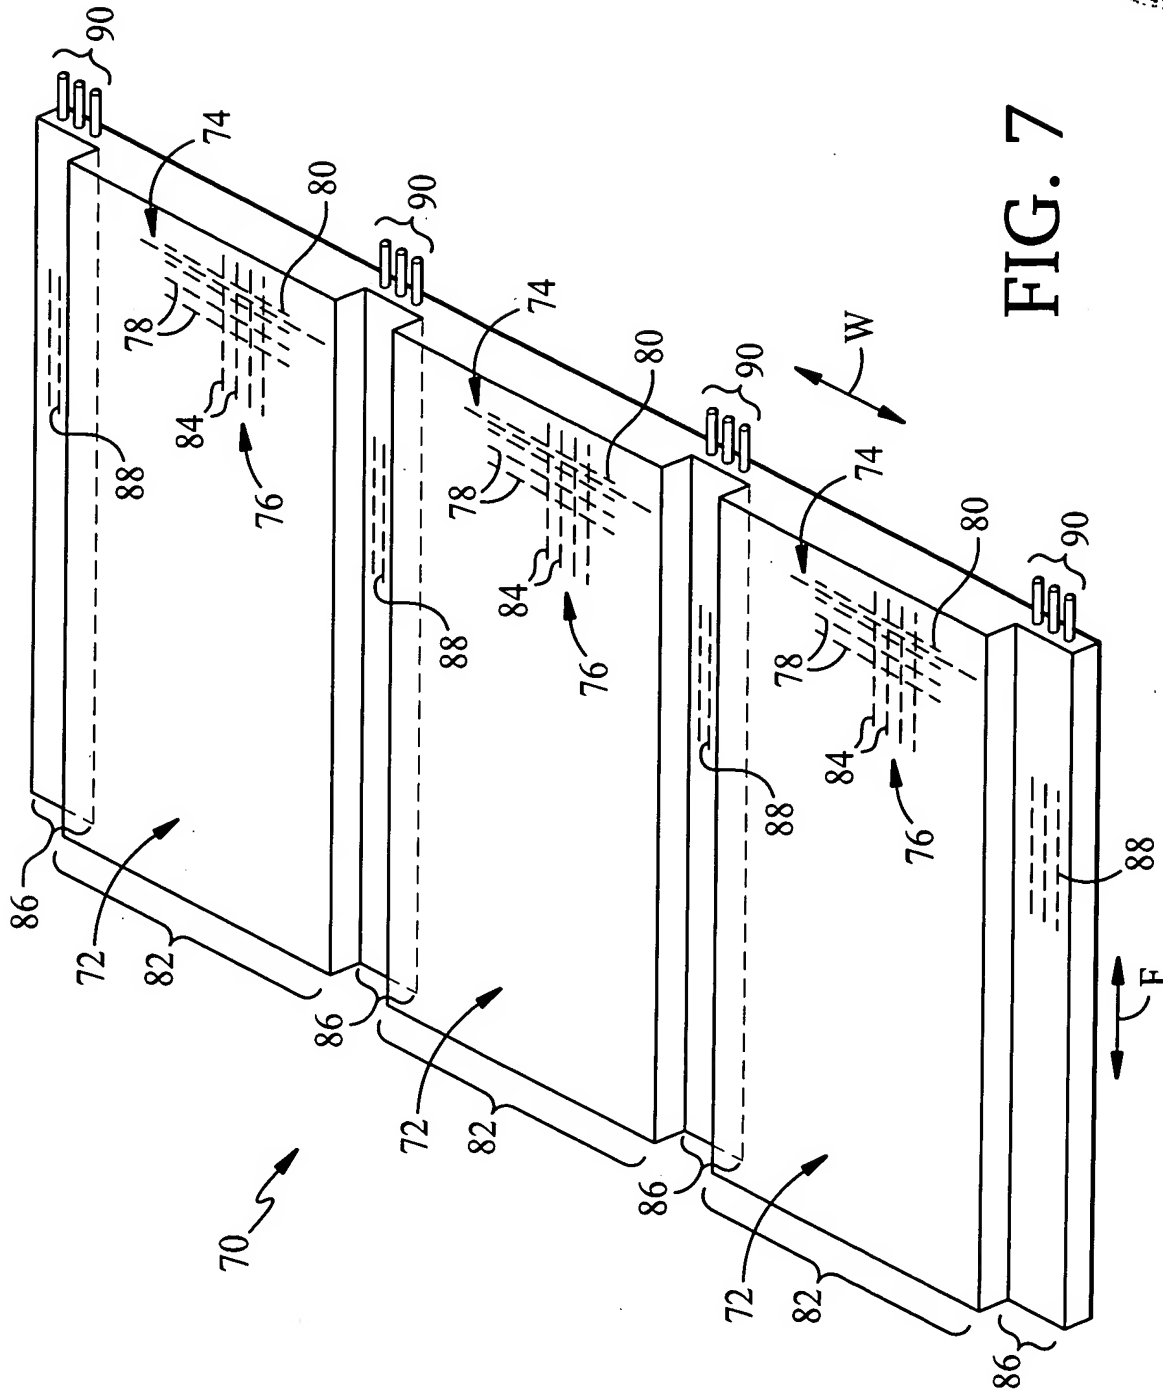


FIG. 7




FIG. 8

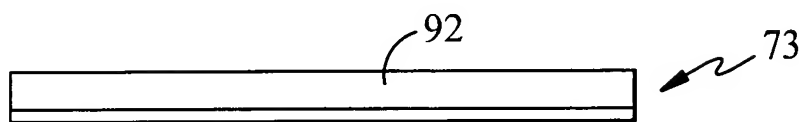


FIG. 8A

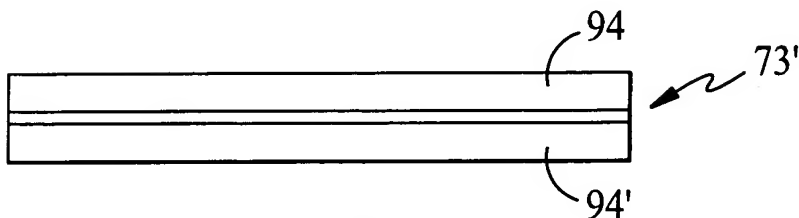


FIG. 8B

10082465.04.1.202

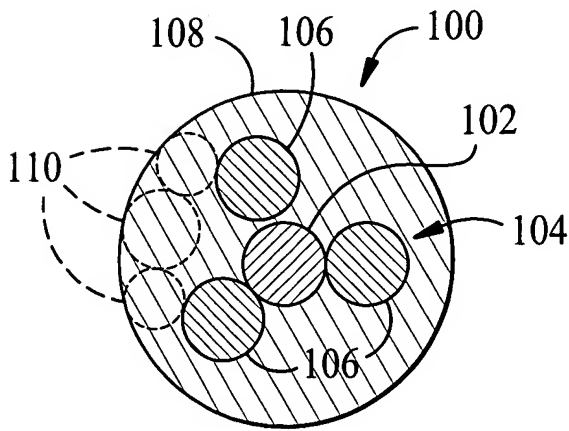


FIG. 9

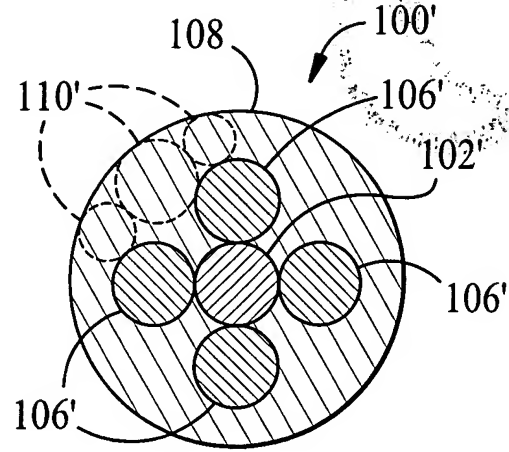


FIG. 10

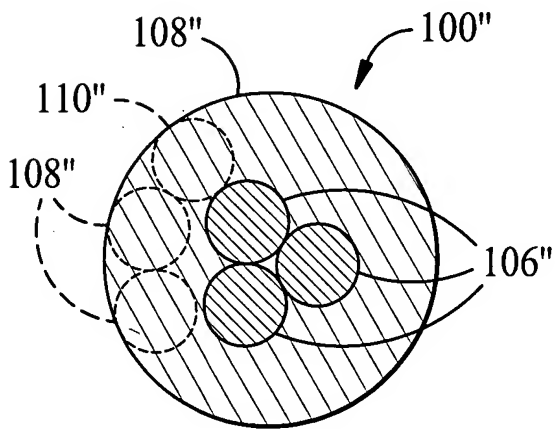


FIG. 11

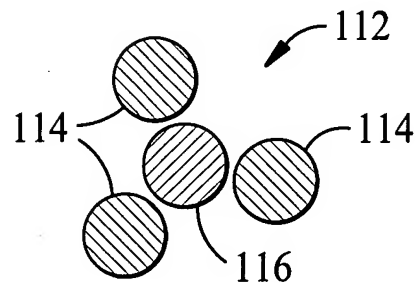


FIG. 12


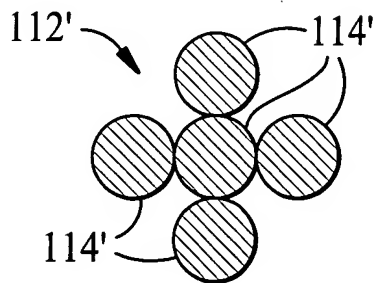


FIG. 13

202405041200T



A cross-sectional view of a device. It features a base layer with a dashed line indicating an internal interface. A raised portion, labeled 18, is on the left. To its right is a lower section labeled 22. A circular contact point, labeled 120, is shown on the right side of the lower section, with a wavy line labeled 122 indicating a connection or signal. A dashed line labeled 30 points to the internal interface, and a label 124 points to the base layer.

FIG. 16

FIG. 17

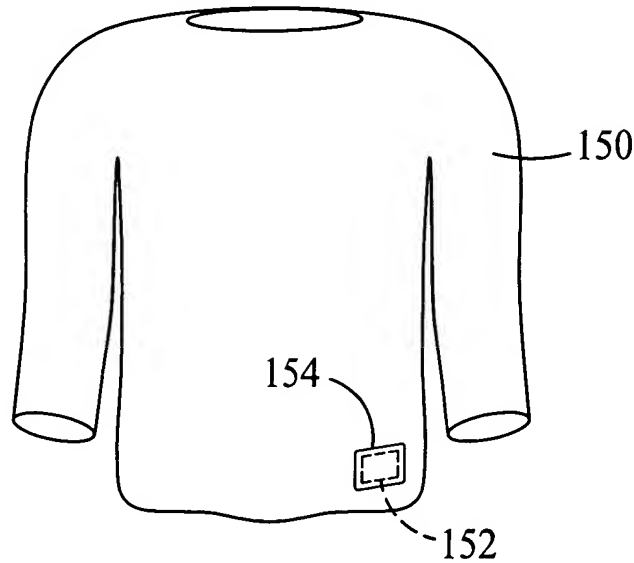
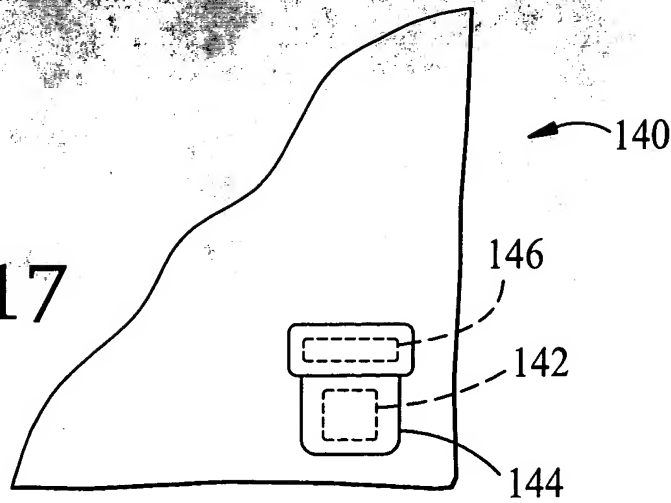


FIG. 18

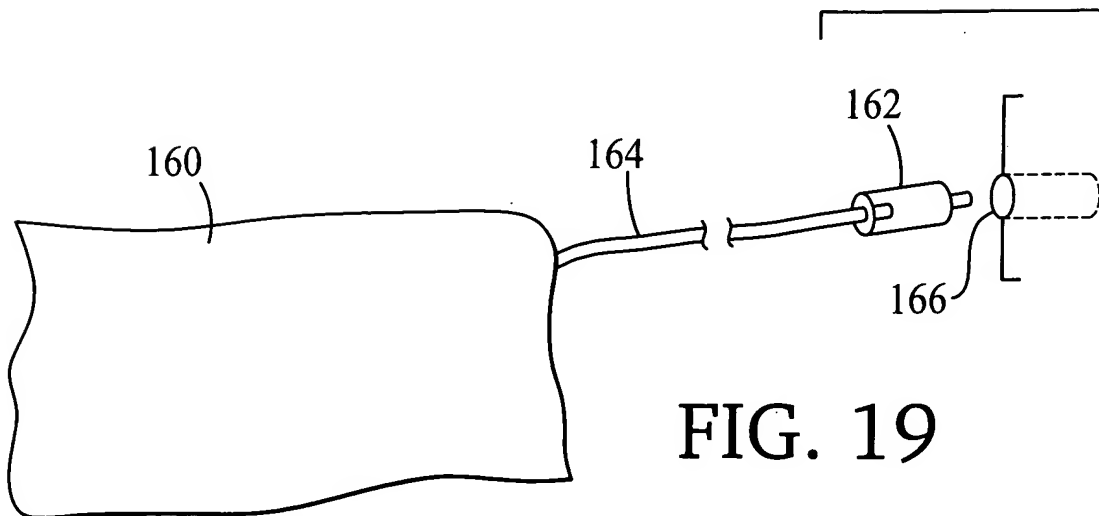


FIG. 19

202110"59428001



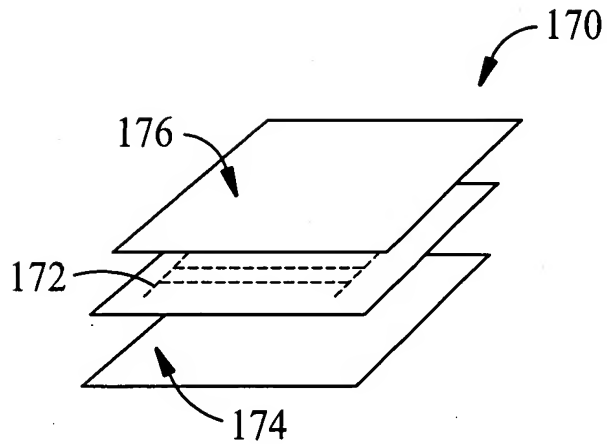


FIG. 20

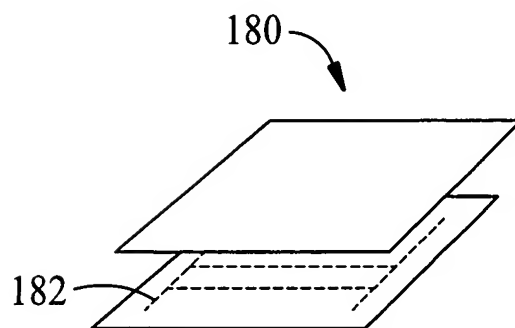


FIG. 21

202405.041202